

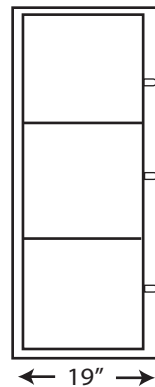
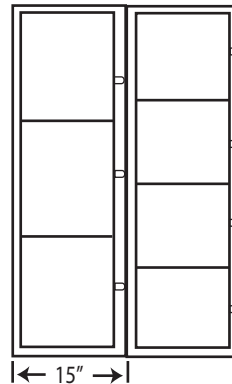


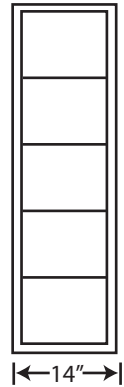

Statesman Compu-Lok®

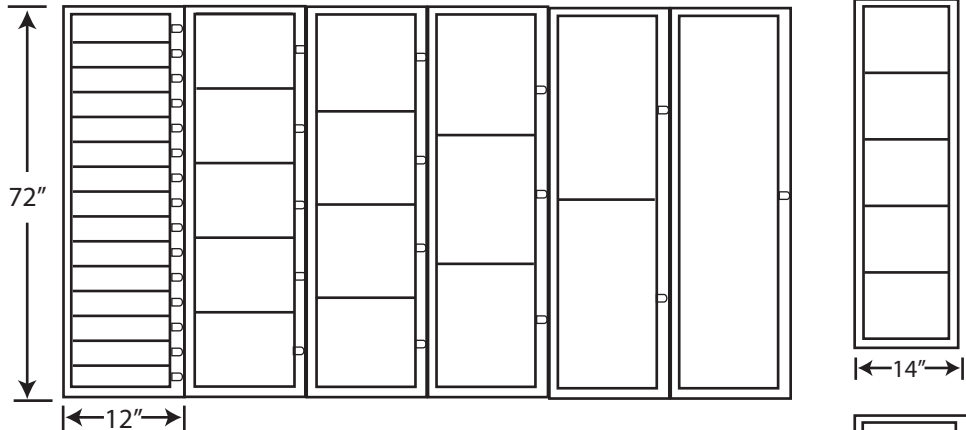

| Tier | Compartment | | | Overall dimensions |
|--------|-------------|-----|---------|--------------------|
| | W | D | H | |
| SCL-1 | 12" | 18" | 72" | 12" x 18 x 72 |
| SCL-2 | 12" | 18" | 36" | 12" x 18 x 72 |
| SCL-3 | 12" | 18" | 24" | 12" x 18 x 72 |
| | 15" | 31" | 24" | 15" x 31 x 72 |
| | 19" | 31" | 24" | 19" x 31 x 72 |
| SCL-4 | 12" | 18" | 18" | 12" x 18 x 72 |
| | 15" | 18" | 18" | 15" x 18 x 72 |
| | 15" | 24" | 18" | 15" x 24 x 72 |
| | 15" | 31" | 18" | 15" x 31 x 72 |
| SCL-5 | 12" | 18" | 14-2/5" | 12" x 18 x 72 |
| | 12" | 21" | 14-2/5" | 12" x 21 x 72 |
| | 14" | 21" | 14-2/5" | 14" x 21 x 72 |
| SCL-15 | 12" | 18" | 12" | 12" x 18 x 72 |

MATERIAL: Cold rolled steel doors, frames, panels with powder coat paint finish; stainless steel hardware.

LOCKS: Electronic Access System with electronic lock activated by using keypad to enter personal identification 7 digit code number.

- System can be programmed with four codes per compartment.
- Management code allows immediate access to all compartments.
- Mechanical override provided in event of power failure.
- System provides computerized audit trail of usage and access.
- Keypads can be mounted within storage unit or as remote wall mount.

DOOR FABRICATION:

- Smooth steel, self-closing louverless, 180 degree swing.
- Channel box formed with reinforced turned ends.
- Two stainless steel spring loaded hinges per door 14 Gauge.
- Stainless steel door closure and handle.
- Rear Doors: Full height of tier provides access to all compartments in tier.

FRAME FABRICATION:

- Welded overlapping construction.
- Channel formed with double thickness lock and cash receptacle housing.
- Channel formed and interlocked intermediate cross members.

BODY FABRICATION: Flanged, reinforced and back ventilated.

FINISH: Powder coat in sandalwood/sand or platinum silver/grey.

GAUGES:

- | | | | |
|----------|----|----------------|----|
| - Top: | 20 | - Shelves: | 20 |
| - Sides: | 24 | - Front Frame: | 16 |
| - Backs: | 24 | - Doors: | 16 |

ASSEMBLY: Factory assembled by welding frames and doors to the fully assembled body module, three frames or less in width.

OPTIONS:

- 4" high recessed CRS bases painted black.
- Sloping tops.
- Finished end panels.

Statesman Compu-Lok

| | | | |
|-------|--------|--------|----|
| MODEL | | | |
| DWG#: | | SCALE: | |
| DATE: | 9/8/07 | BY: | er |